


YX-M5819-VerA

RK3568 Motherboard Specifications

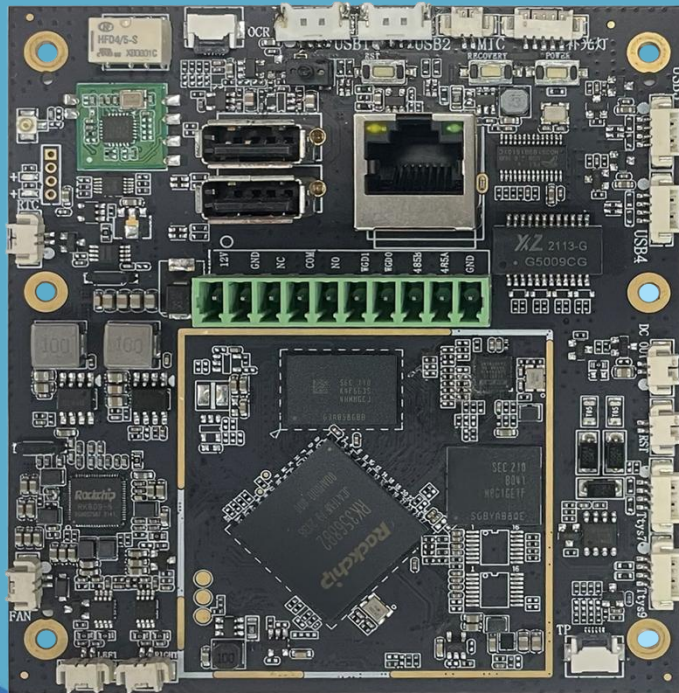

www.sunshine-tek.com

更新记录 Update Record



硬件版本 Hardware Version	更新日期 Updated	更新内容 Update Content	拟制人 Producer
VerA	2023-1-10	首次发行 INITIAL ISSUE	Anson

目录 Content

1. 产品概述	Product Description.....	3
2. 应用场景	Application Scenarios.....	4
3. 规格参数	Specifications.....	5
4. 主板尺寸	Motherboard Size.....	8
5. 接口描述	Interface Description.....	9
6. 接口定义	Interface Definition.....	11
7. 注意事项	Precautions.....	21
8. 关于我们	About us.....	23


1. 产品概述 Product Description

YX-M5819 安卓主板, 采用瑞芯微 RK3568 四核芯片, 其配置为 4 核 64 位 Cortex A55 CPU, 主频高达 2.0GHz, GPU 为 Mali-G52 2EE, NPU 拥有 1T 算力, 板载 2G/4G/8GB DDR4 和 8G~128GB eMMC, 其具有强大的音视频处理能力, 支持 MIPI 屏显示输出, 可支持 2.4G 和 5G 双频双天线 WIFI 和蓝牙 4.0 模块功能。支持 6 个 USB 口, 2 个串口, 能扩展更多的外设设备。可提供全方位技术支持服务, 加快产品上市周期。

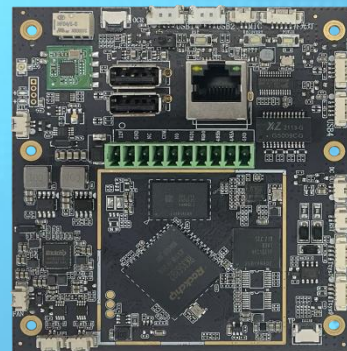

全新四核 Cortex-A55 CPU

四核 Cortex-A55 64 位处理器, 主频最高达 2.0GHz



Mali-G52 2EE GPU

支持 OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1, 内嵌高性能 2D 加速硬件, 支持 1T 算力 NPU



可支持 8G 内存

板载 2G/4G/8GByte DDR4, 8~128GByte eMMC



MIPI 显示

MIPI 屏、TP 触摸



强大的网络通讯功能

10/100/1000M 以太网 (RJ45)
2.4G/5G 双频 WIFI
蓝牙 4.0



Android 系统

支持 Android 11 操作系统



丰富的拓展接口

OCR、RESET、FAN、USB2.0、TTL/RS232 串口、LED



广泛的应用领域

智慧通行、智能门禁、工业控制等

2. 应用场景 Application Scenarios




智慧通行-车辆管理



智慧通行-电子哨兵



智慧通行-人脸考勤



智慧通行-人脸门禁



智慧通行-人脸闸机



工控机

产品广泛应用金融、传媒、支付、零售、工业控制、教育、政企、医疗等公共场所的智慧通行终端产品，适用于电子哨兵、人脸考勤、人脸考勤、车辆出入管理等通行管理。公司可提供硬件、软件定制化服务，满足广大客户的各类产业需求。

3. 规格参数 Specifications

基本参数

Basic Parameters

CPU	瑞芯微 RK3568 四核 Cortex-A55 频率 2.0GHz
GPU	Mali-G52 2EE 处理引擎, 支持 4K、H.265 硬件解码
NPU	支持 1T 算力
内存	DDR4 2G/4G/8G 可选
内置存储容量	EMMC 8G/16G/32G/64G/128G 可选
视频编解码	支持 4K 60fps H.265/H.264/VP9 视频解码、支持 1080P 60fps H.265/H.264 视频编码、支持 8M ISP, 支持 HDR
操作系统	安卓 11 及 Linux

硬件参数


Hardware Parameters

音频	D Class 超大内置功放, 可支持 3W/4R*2
显示接口	1 个 MIPI
Camera	MIPI Camera 接口 或 USB Camera 接口
以太网	具备 RJ45 接口, 支持 10/100/1000M Ethernet
3G/4G	需外置 4G 小板
Wifi/蓝牙	内置 1 个 WiFi/BT4.0 二合一模块 2.4G 5G 可选
USB	4 个 USB HOST 2.0+2 个 USB 外置
串口	2 路 RS232 或 TTL 串口
SATA 接口	无
TF 卡	无
RTC 计时功能	支持
其他接口	支持 OCR、LED、RST、FAN、RTC 等
驱屏电压	3.3V/5V 可选



工作电压	12V
系统软件 System Software	
操作系统	安卓 11
基本软件功能	网页浏览、网络聊天、电子邮件、电子书、资源管理器
视频格式	支持 MP4、RMVB、WMV、AVI、FLV、MPEG
图片格式	支持 JPEG、BMP、PNG
录音	支持 MP3、WMA 格式录音
语言支持	多国语言
音效模式	时钟、闹钟、计算器、录音
文书处理	EPUB, WORD, EXCEL, POWERPOINT, PDF, TXT
电子书	PDF/TXT/CHM/DOC/EXCEL/EPUB/RTF/FB2
日程	日历
输入法	标准 Andriod 键盘, 可选第三方输入法 (中文、韩文、日文等)
工具	Calendar
	Alarm Clock
	计算器
	便条纸
	天气+时钟
	录音
网络	Browser -ChromeLite
	GOOGLE Market
	Email
	Gmail
	Google talk
系统管理	APK 安装器
	原生态 Android 系统, 开放 root 权限, 可进行产品定制开发
	实时远程监控, 系统崩溃自恢复, 7*24 小时无人值守



	System setting
	Google Maps
	Global time
其他参数 Other Parameters	
尺寸	长*宽=103.5*95mm

4. 主板尺寸 Motherboard Size

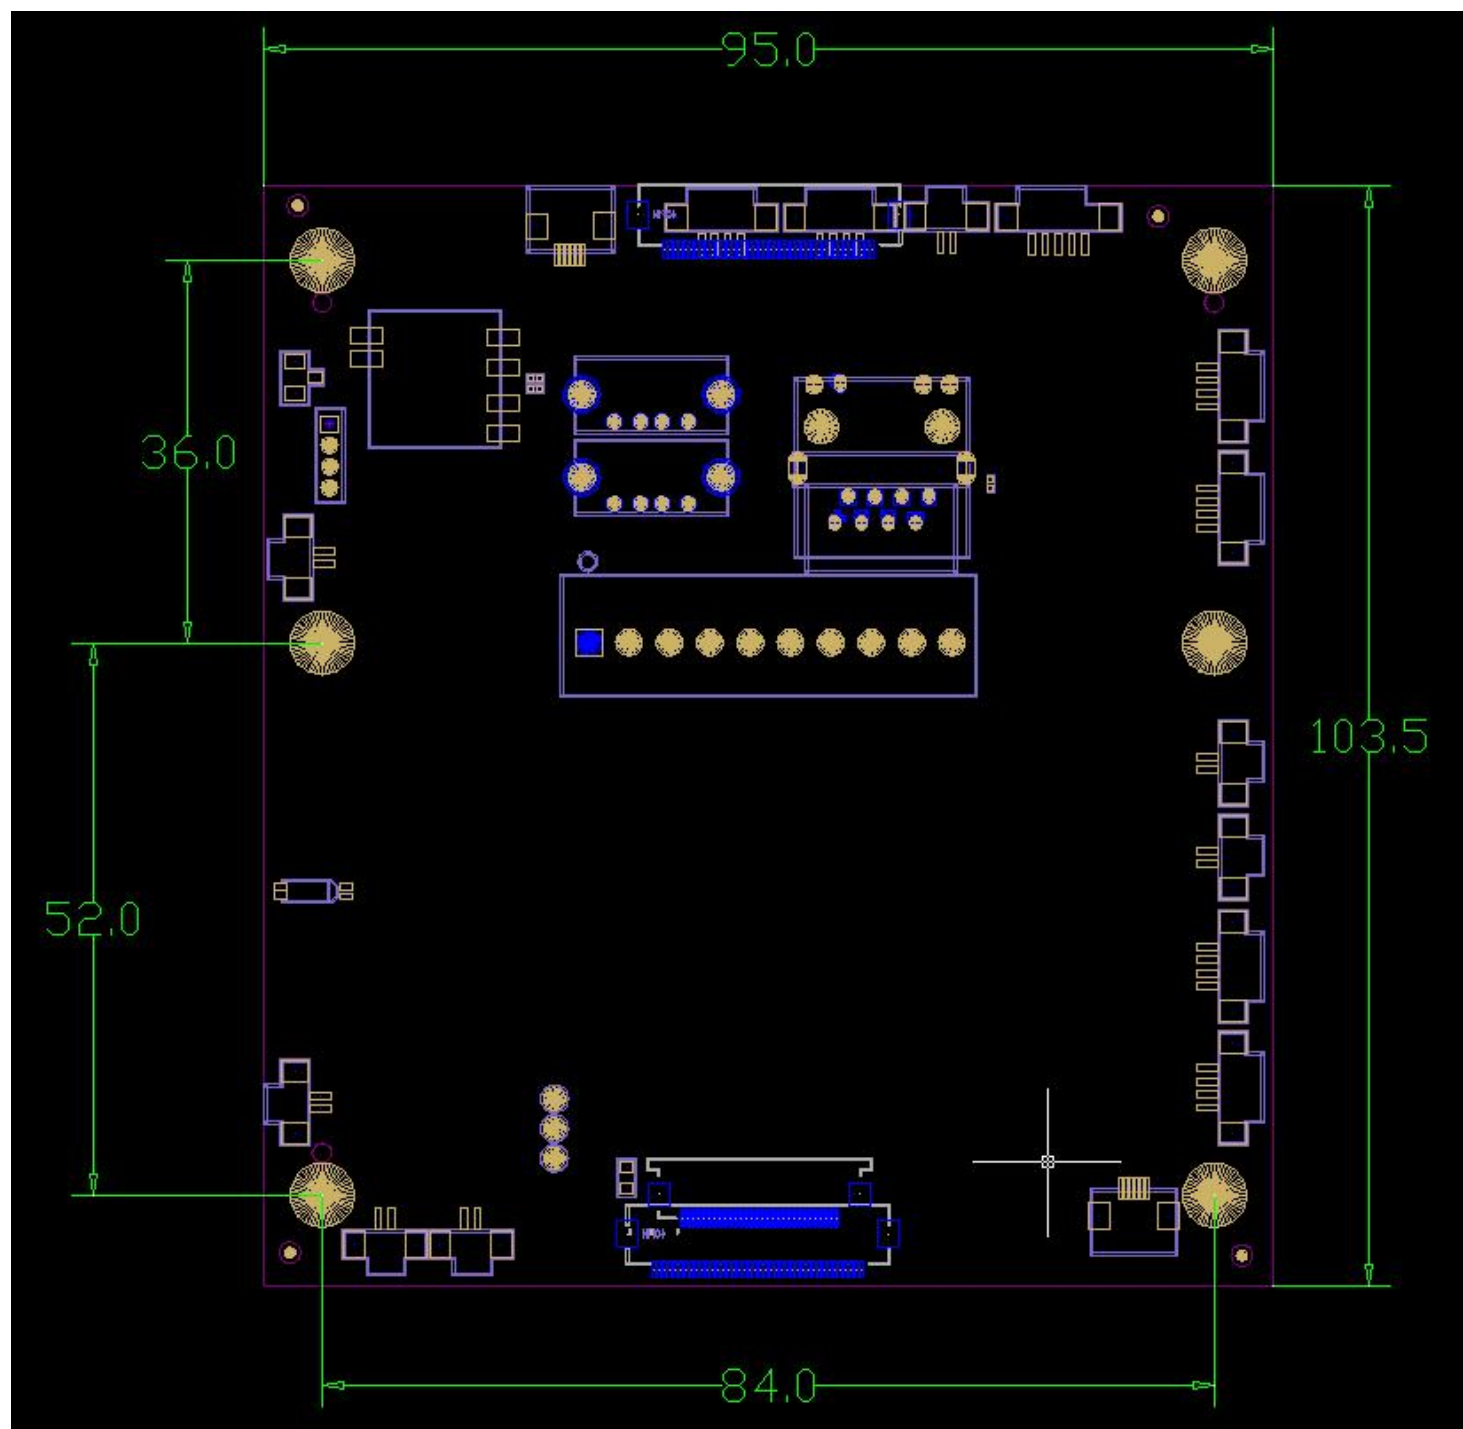

5. 接口描述 Interface Description

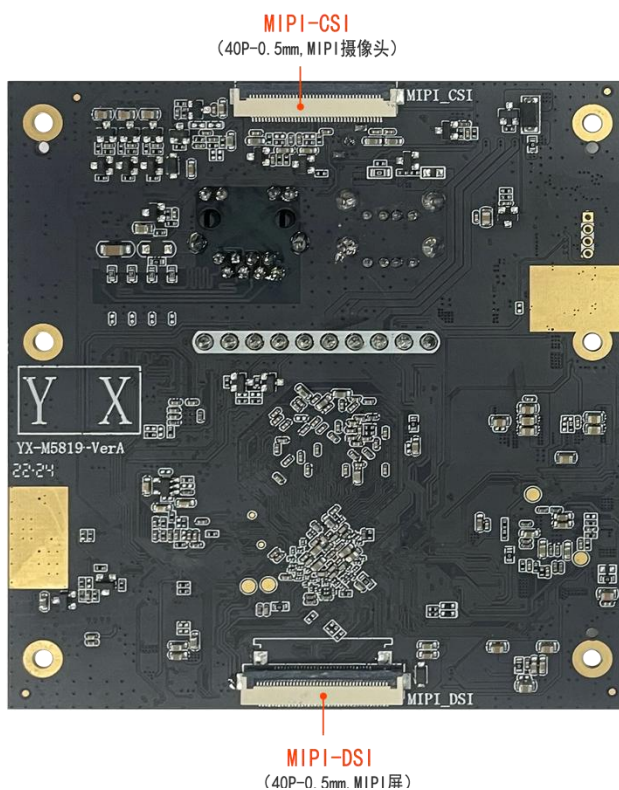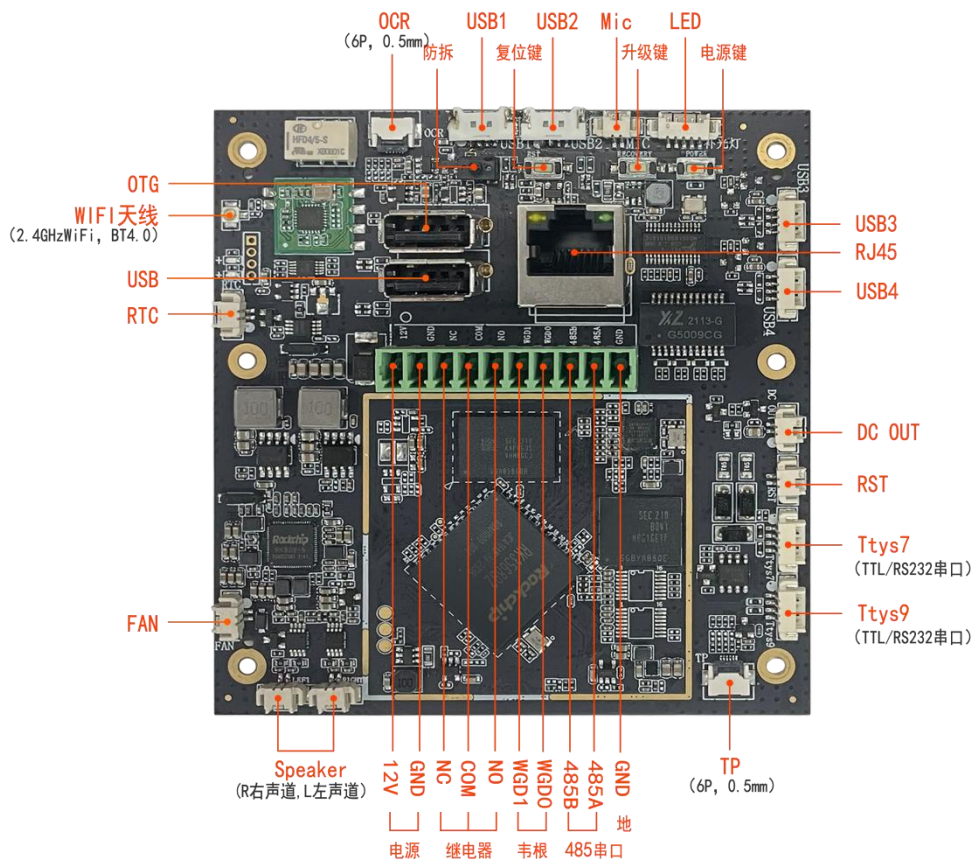

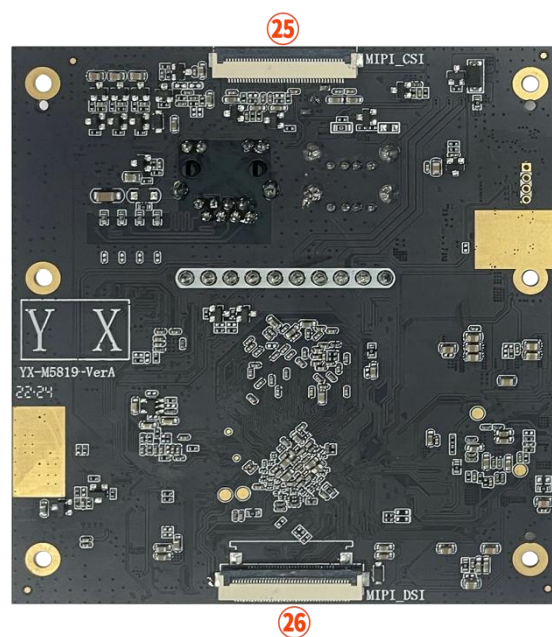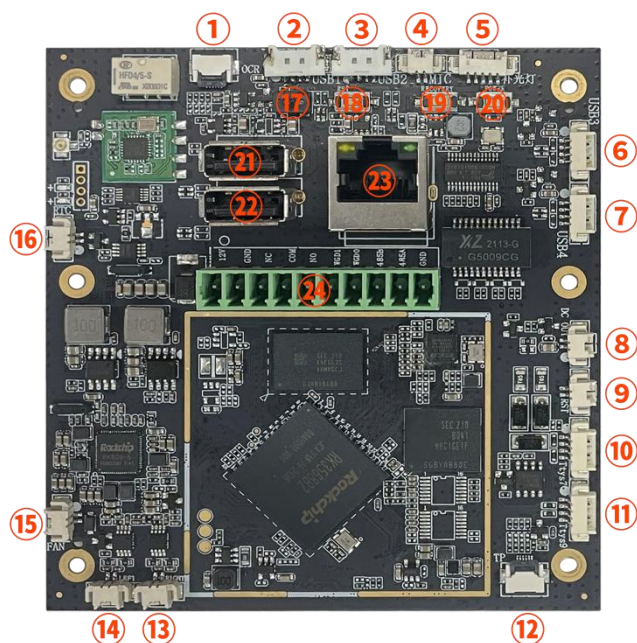

- | | | |
|------------------|-------------|--------------|
| ① OCR | ⑫ TP 屏 | ⑳ 电源键 |
| ② ③ ⑥ ⑦ USB | ⑬ ⑭ 左/右声道喇叭 | ㉑ OTG |
| ④ MIC | ⑮ FAN | ㉒ USB |
| ⑤ LED | ⑯ RTC | ㉓ RJ45 |
| ⑧ DC OUT | ⑰ 防拆键 | ㉔ 10PIN 凤凰接口 |
| ⑨ RST | ⑱ 复位键 | ㉕ MIPI 摄像头 |
| ⑩ ⑪ TTL/RS232 串口 | ⑲ 升级键 | ㉖ MIPI 屏 |

6. 接口定义 Interface Definition

① OCR Connector (6PIN/0.5) (OCR 接口)




序号	定义	属性	描述
1	VCC_SENSOR		Power Supply (3.3V 供电)
2	I2C_SCL-OCR		I2C_SCL (时钟)
3	I2C_SDA-OCR		I2C_SDA (数据)
4	OCR_INT		TP_INT (中断)
5	OCR_RST		TP_RST (复位)
6	GND		Ground (地)

②③⑥⑦ EXT-USB CONNECTOR (4PIN/1.25) (USB 插座)*4




序号	定义	属性	描述
1	VCC		+5V Power Supply (+5V 供电)
2	DM		USB Data- (USB 数据-)
3	DP		USB Data+ (USB 数据+)
4	GND		Ground (地)

④ MIC CONNECTOR (2PIN/1.25) (麦克风插座)

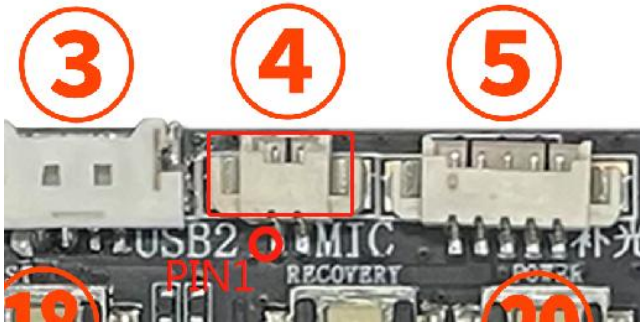


序号	定义	属性	描述
1	MIC-P		MIC + (麦克风 正)
2	MIC-N		MIC - (麦克风 负)

⑤ FILL LIGHT CONNECTOR (5PIN/1.25) (补光灯插座)

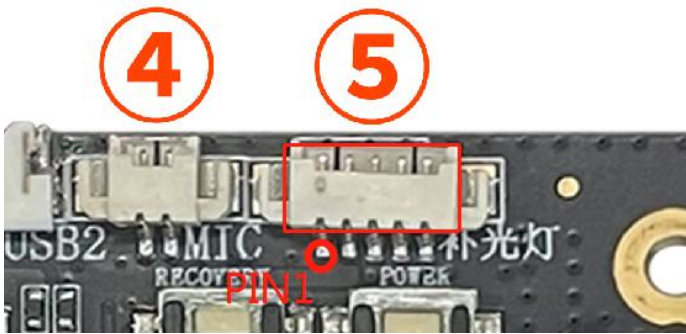


序号	定义	属性	描述
1	GND		Ground (地)
2	LED-		LED 指示灯
3	B-LED		蓝色补光灯
4	R-LED		红色补光灯
5	G-LED		绿色补光灯

⑧ DC OUT CONNECTOR (2PIN/1.25) (电源输出接口)

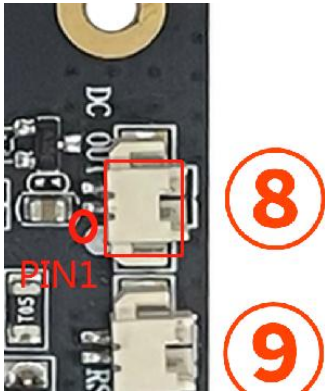


序号	定义	属性	描述
1	12V		12V POWER IN (电源 12V 输出)
2	GND		Ground (地)

⑨ RST CONNECTOR (2PIN/1.25) (复位键接口)

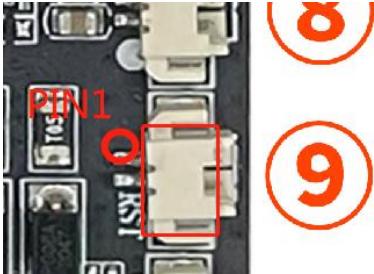


序号	定义	属性	描述
1	RESRT		连接复位按键
2	GND		Ground (地)

⑩ Ttys7 CONNECTION (6PIN/1.25) (TTL/RS232 串口接口)

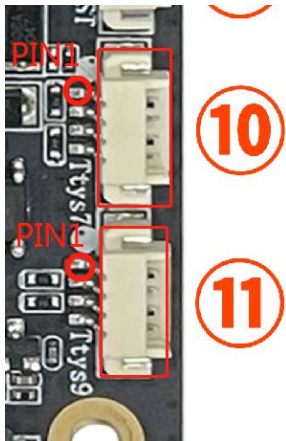


序号	定义	属性	描述
1	3V3/5V		Power Supply (+3.3V/5V 可选 默认 5V)
2	TX7		Ttys7 Data Transmitter (RS232 数据发射)
3	RX7		Ttys7 Data Receiver (RS232 数据接收)
4	GND		Ground (地)

⑪ Ttys9 CONNECTION (4PIN/1.25) (TTL/RS232 串口接口)

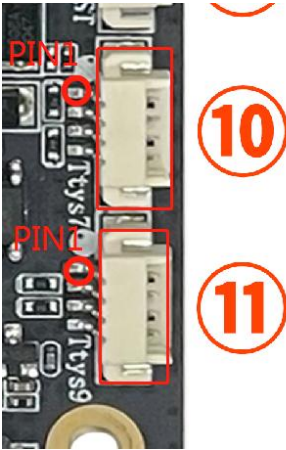

序号	定义	属性	描述
1	3V3/5V		Power Supply (+3.3V/5V 可选 默认 5V)
2	TX9		Ttys9 Data Transmitter (RS232 数据发射)
3	RX9		Ttys9 Data Receiver (RS232 数据接收)
4	GND		Ground (地)


⑫ TP Connector (6PIN/0.5) (TP 屏接口)

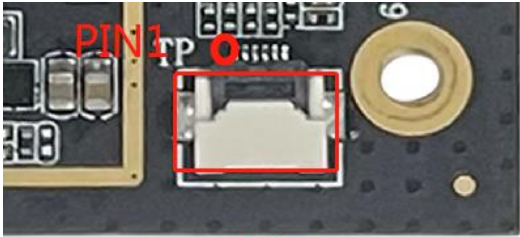

⑫

序号	定义	属性	描述
1	I2C_SCL_TP		I2C_SCL (时钟)
2	I2C_SDA_TP		TP_SDA (数据)
3	TP_VCC		3.3V 供电
4	TP_RST		TP_RST (复位)
5	TP_INT		TP_INT (中断)
6	GND		Ground (地)

⑬ RIGHT SPEAK CONNECTOR (2PIN/1.25) (R-右声道喇叭插座)

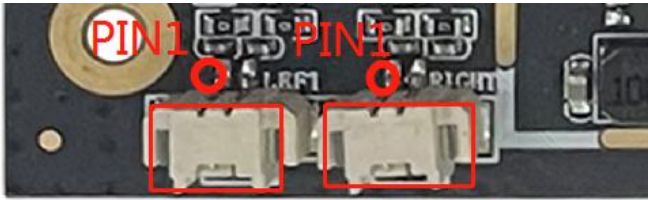

⑭

⑬


序号	定义	属性	描述
1	RP		R+ (右声道正)
2	RN		R- (右声道负)

⑭ LEFTT SPEAK CONNECTOR (2PIN/1.25) (L-左声道喇叭插座)




序号	定义	属性	描述
1	LN		L- (左声道负)
2	LP		L+ (左声道正)

⑮ FAN CONNECTOR (2PIN/1.25) (风扇插座)

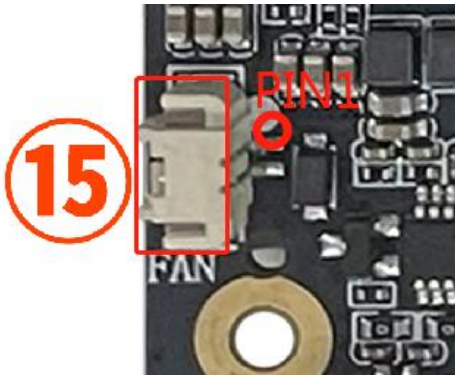

序号	定义	属性	描述
1	FAN_P		FAN+ (风扇正)
2	FAN_N		FAN- (风扇负)

①⑥ RTC CONNECTOR (2PIN/1.25) (RTC 插座)

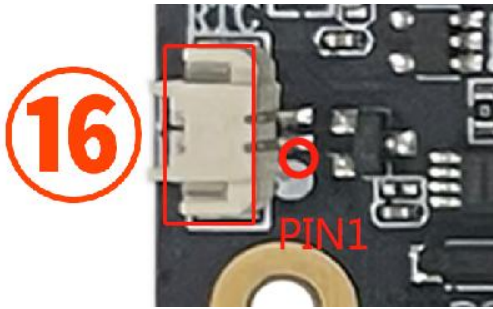

序号	定义	属性	描述
1	GND		Ground (地)
2	VCC		Power Supply (3.3V)


②⑤ MIPI CAM Connector (40PIN/0.5) (MIPI 摄像头接口)



序号	定义	属性	描述
1	IR		VCCAVDD-IR
2	RGB		VCCAVDD-RGB
3	D1		MIPI_CAM0_PDN_L_GPIO3_D1
4	D0		MIPI_CAM0_RST_L_GPIO3_D0
5	SCL		I2C2_SCL_M1
6	SDA		I2C2_SDA_M1
7	GND		Ground (地)
8	CIF_CLKOUT		CIF_CLKOUT
9	GND		Ground (地)
10	CLKOP		MIPI_CSI_RX_CLK0+ Signal

11	CLK0N		MIPI_CSI_RX_CLK0- Signal
12	GND		Ground (地)
13	D0P		MIPI_CSI_RX_D0+ Signal
14	D0N		MIPI_CSI_RX_D0- Signal
15	GND		Ground (地)
16	D1P		MIPI_CSI_RX_D1+ Signal
17	D1N		MIPI_CSI_RX_D1- Signal
18	GND		Ground (地)
19	VCC		VCC1V8_D0VDD
20	FSYNC_IN		FSYNC_IN
21	NC		NC
22	IR		VCCDVDD_IR
23	RGB		VCCDVDD_RGB
24	D5		MIPI_CAM1_PDN_L_GPIO3_D5
25	D4		MIPI_CAM0_RST_L_GPIO3_D4
26	GND		Ground (地)
27	MCLK1		MIPI_CAM_MCLK1
28	GND		Ground (地)
29	CLK1P		MIPI_CSI_RX_CLK1+ Signal
30	CLK1N		MIPI_CSI_RX_CLK1- Signal
31	GND		Ground (地)
32	D2P		MIPI_CSI_RX_D2+ Signal
33	D2N		MIPI_CSI_RX_D2- Signal
34	GND		Ground (地)
35	D3P		MIPI_CSI_RX_D3+ Signal
36	D3N		MIPI_CSI_RX_D3- Signal
37	GND		Ground (地)
38	VCC		VCC_5V_CAM
39	VCC		VCC_5V_CAM
40	VCC		VCC_5V_CAM

26 MIPI Connector (40PIN/0.5) (MIPI 驱屏接口)

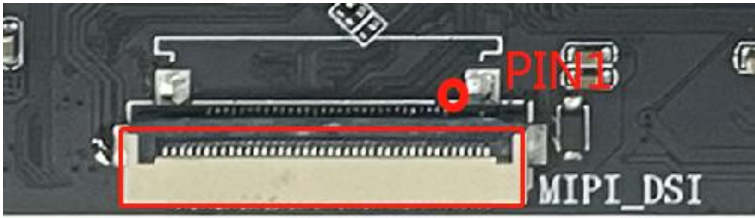

26

序号	定义	属性	描述
1	LED+		LED+
2	LED+		LED+
3	NC		NC
4	NC		NC
5	NC		NC
6	NC		NC
7	NC		NC
8	NC		NC
9	LED-		LED-
10	LED-		LED-
11	GND		Ground (地)
12	NC		NC
13	NC		NC
14	NC		NC
15	NC		NC
16	GND		Ground (地)
17	NC		NC
18	NC		NC
19	GND		Ground (地)
20	D3P		MIPI_DSI_TX0_ D3+ Signal
21	D3N		MIPI_DSI_TX0_ D3- Signal
22	GND		Ground (地)
23	D2P		MIPI_DSI_TX0_ D2+ Signal

24	D2N		MIPI_DSI_TX0_ D2- Signal
25	GND		Ground (地)
26	CLKP		MIPI_DSI_TX0_ CLK+ Signal
27	CLKN		MIPI_DSI_TX0_ CLK- Signal
28	GND		Ground (地)
29	D1P		MIPI_DSI_TX0_ D1+ Signal
30	D1N		MIPI_DSI_TX0_ D1- Signal
31	GND		Ground (地)
32	D0P		MIPI_DSI_TX0_ D0+ Signal
33	D0N		MIPI_DSI_TX0_ D0- Signal
34	GND		Ground (地)
35	NC		NC
36	RST		LCD_RST_MIPI (复位)
37	GND		Ground (地)
38	VCC		LCD_1V8
39	VCC		LCD_VDD
40	VCC		LCD_1V8

7. 注意事项 Precautions

7.1. 环境特性要求 Environmental Characteristics

7.11 环境温度 Temperature

Operating: 0°C to +40°C

Store: -20°C to +70°C

7.12 环境湿度 HumidityStore

Operating: 10% to 90% (non-condensing)

Store: 5% to 95% (non-condensing)

7.13 海拔高度 Altitude

Operating: 10,000 ft.(max)

Store: 20,000ft.(max)

7.14 高温负荷与存储 High Temperature & Storage

测试方法和测试条件参见 GB2423.2 “试验 Bd & Bb”之说明

Test method & condition please refer to the description of GB2423.2 “Test Bd & Bb”

7.15 低温负荷与存储 Low Temperature & Storage

测试方法和测试条件参见 GB2423.1 “试验 Ad & Ab”之说明

Test method & condition please refer to the description of GB2423.1 “Test Ad & Ab”

7.16 潮热试验 Humidity & Temperature Test

测试方法和测试条件参见 GB2423.3 “试验 Ca” 和 GB2423.22“试验 Nb”之说明

Test method & condition please refer to the description of GB2423.3 “Test Ca” & GB2423.22“Test Nb”

7.2 组装使用注意事项 Precautions for assembly and use

在组装使用过程中，请注意并检查以下（且不限于）问题点：

During assembly and use, please pay attention to and check the following (and not limited to) problem points:

1. 主板是否会与屏的外框、支架等外设短路；
Whether the motherboard will be short-circuited with peripherals such as the frame and bracket of the screen;
2. 在安装固定过程中，避免主板因固定原因而造成主板变形；
During the installation and fixing process, avoid the motherboard deformation caused by the fixing reasons;
3. 安装 LVDS 屏时，注意屏电压，跳帽在正确的电压是上，注意屏座子第 1 脚方向。
When installing the LVDS screen, pay attention to the screen voltage, the jumper cap is on the correct voltage, and pay attention to the direction of the first pin of the screen seat;
4. 安装 LVDS 屏时，注意屏背光电压、电流是否符合，注意屏背光的功率在 20W 以上的话，考虑是否使用其他电源板供电；
When installing an LVDS screen, pay attention to whether the voltage and current of the backlight of the screen are in compliance. If the power of the backlight of the screen is above 20W, consider whether to use other power boards for power supply;
5. 外设（USB, IO, ETC）安装时，注意外设 IO 属性和电流输出问题；
When installing peripherals (USB, IO, ETC), pay attention to peripheral IO levels and current output issues;
6. 串口安装时，注意是否直连了 RS232, TTL 设备，TX、RX 接法是否正确，属性是否正确。
When installing the serial port, pay attention to whether the RS232 and TTL devices are directly connected, whether the TX and RX connection methods are correct, and whether the level is correct;
7. 输入电源是否接在电源输入接口上，根据总外设评估输入电源电压、电流等是否满足要求。
Whether the input power is connected to the power input interface, and whether the input power voltage, current, etc. meet the requirements according to the total peripherals.

8. 关于我们 About us

I 公司简介 Company Profile

深圳市昱昱科技有限公司，作为嵌入式终端产品的方案提供商，一直致力于智能主板研发:提供从电子电路硬件设计，嵌入式软件定制，Android、Linux 主板系统定制到整套解决方案。

Shenzhen Sunshine Technology Co., Ltd., as a solution provider of embedded terminal products, has been committed to the research and development of intelligent motherboards: providing a complete set of solutions from electronic circuit hardware design, embedded software customization, Android, Linux motherboard system customization.

昱昱坚持以自主研发和行业应用为基础，基于强大的自主研发创新和对行业需求的深刻理解，在 ARM 工控主板、人脸识别门禁考勤、刷脸支付、智慧商显、电子班牌等信息建设领域为用户提供最全面、周到的应用解决方案。无论是商用、工业等应用领域，均已形成严谨的、系统的产品服务体系。

Sunshine-Tek insists on independent research and development and industrial applications as the basis, based on strong independent research and development innovation and a deep understanding of industry needs, in ARM industrial control motherboard, face recognition access control attendance, face payment, smart business display, electronic class card and other information The construction field provides users with the most comprehensive and thoughtful application solutions. Whether it is commercial, industrial and other application fields, a rigorous and systematic product service system has been formed.

昱昱以人为本，以客户为中心，开放、务实的管理理念贯穿在日常经营管理工作中，造就了和谐互助的团队氛围，给每一位员工提供良好的发展环境。通过我们的共同努力，实现公司、员工、客户三者的共赢。

Sunshine-Tek is people-oriented, customer-centric, and the open and pragmatic management concept runs through its daily operation and management, creating a harmonious and mutually helpful team atmosphere and providing a good development environment for every employee. Through our joint efforts, we will achieve a win-win situation for the company, employees and customers.

昱昱以服务和质量作为开拓国内市场的基础，以快揭的服务和稳定的质量求生存，秉承“为您创造更多价值”为服务宗旨。始终不渝地以更专业的技术和更个性化的服务全力支持合作伙伴，合作共赢是我们生存的唯一理由。

Sunshine-Tek takes service and quality as the basis for developing the domestic market, strives for survival with quick service and stable quality, and adheres to the service tenet of "creating more value for you". Unswervingly support our partners with more professional technology and more personalized services, and win-win cooperation is the only reason for our survival.

I 深圳市昱昱科技有限公司

官网: <http://www.sunshine-tek.com/>

电话: 18928450399

座机: 0755-21008246

邮箱: lee@sunshine-tek.com

地址: 广东省深圳市龙华大浪华兴路安宏基星曜产业园 213-218 号

淘宝商城: <https://shop288016539.m.taobao.com>



微信公众号，扫一扫关注我们